



www.hardideck.com

HARDIDECK // CANTILEVERED LOADING PLATFORM





HARDIDECKS //

CANTILEVERED LOADING PLATFORMS TO FACILITATE THE LOADING AND UNLOADING OF MATERIALS ON MULTI-STORY BUILDING SITES.

KEY FEATURES

Hardidecks comprise of an out board deck which connects to an inboard deck via our Patent Pending pin off system. The outboard deck is relocated via the crane to which ever level is desired to perform material handling operations. Changing levels takes less than two minutes and all actions are performed from a safe position.


The two deck components weigh one tonne each so platforms can be located at the maximum radius of the smallest tower crane. Hardidecks are designed and manufactured in Australia.

OTHER FEATURES INCLUDE:


- Very fast and simple installation
- Multiple propping locations
- Safety harness attachment points
- 4000kg SWL
- Fits between a standard scaffold bay

Hardidecks come in 4.2m x 2m load area or 4.2m x 2.6 m. Other attachments are being developed such as a self loading crane.

TECHNICAL SPECIFICATIONS

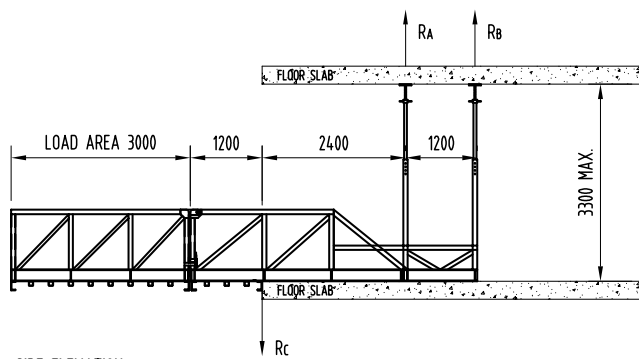

SIDE ELEVATION SCALE:- N.T.S.

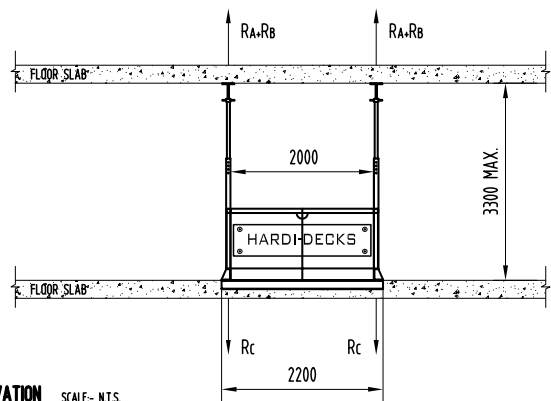

FRONT ELEVATION SCALE:- N.T.S.



SWL



Deck length
from slab edge





Internal deck width



Outboard deck
self weight



Internal
penetration

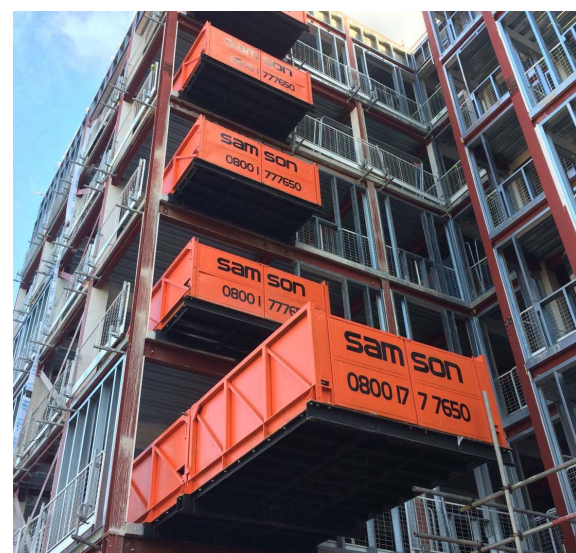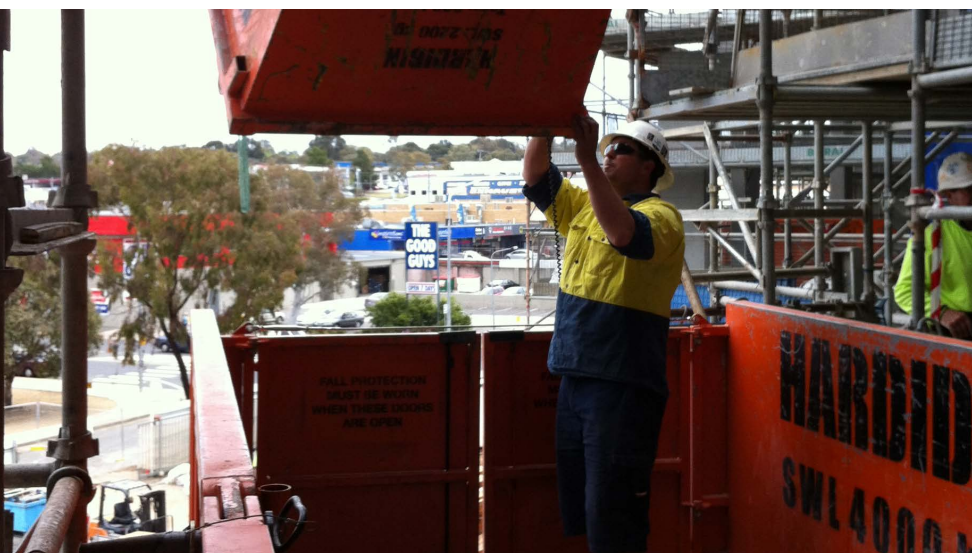

FOR MORE INFORMATION VISIT
WWW.HARDIDECK.COM OR
CALL 1800 800 693





2M DECK SPACE



BACK PROPPING



BOLT DOWN OPTION



MATERIALS CAGE



www.hardideck.com

BRISBANE

Chris Hardiman
0401 811 295
chris@hardiquip.com

SYDNEY

Andy Walker
0427 446 650
andy@hardiquip.com

ADMIN

Pete Hardiman
0417 422 941
pete@hardiquip.com

LONDON & UK

Jason Sudborough
+44 7496 568 020
jason@samsonequipment.co.uk

HARDIQUIP P.O. BOX 216 / CROYDON / NSW 2132 / AUSTRALIA